

**TOUCH SENSOR FOR RECESSING**

**SENSORS AND SWITCHES**


Ref: 41.011

12V - 24V

A touch sensor for recessing with ON-OFF function, yet at the same time regulating the light's intensity with the dimmer. It works at 12V - 24V.




This product is only recommended for indoor use and only 1 sensor can be used in the same installation. The "cell" detecting cable must not be cut as this could cause failure.

**WARNING:** the installation of the sensor with the led strip must be carried out without connecting to the power supply (the line must be disconnected from 230V) as this could shut off and cause malfunctioning.



Power (W)	36W (12V)
Power (W)	72W (24V)
Channels (output)	1
Amps	3A
Sensor size	Ø 22mm
Regulation	yes
Working temperature	-20°C / +45°C
Weight	65g
Waterproofing	IP20
Packaging	1 unit
Guarantee	2 years

Aprobado por: **CE** **RoHS**  
COMPLIANT

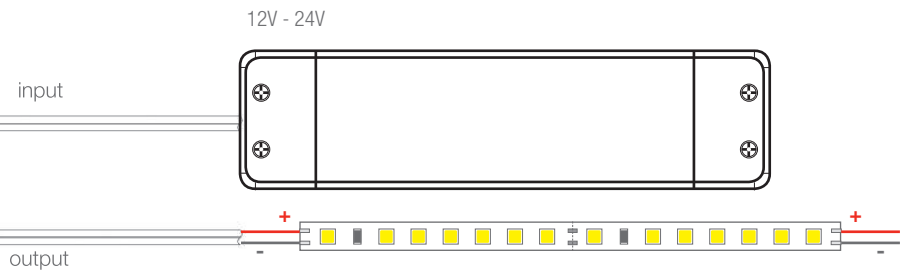

**BARCELONA**  
C/ Carles Buhigues, 13  
08420 Canovelles  
Info@luznegra.net  
Tel: +34 938 402 598

**MADRID**  
C/ Adaptación, 27  
28906 Getafe  
centro@luznegra.net  
Tel: +34 916 416 081

**PARIS**  
113 Avenue Joffre  
77450 Esbly  
france@luznegra.net  
Tel: +33 (0) 160 426 585