

DOUBLE SWITCH FOR DRAWERS AND WARDROBES WITH 2 SENSORS

SENSORS AND SWITCHES



Ref: 41.015

12V - 24V


Pseudo double sensor which is recommended for use in wardrobes with 2 doors and drawers and works at 12V-24V. Working range (ON-OFF) 0-4cms.

This product is only recommended for indoor use and only 1 sensor can be used in the same installation. The "cell" detecting cable must not be cut as this could cause failure.

WARNING: the installation of the sensor with the led strip must be carried out without connecting to the power supply (the line must be disconnected from 230V) as this could shut off and cause malfunctioning.

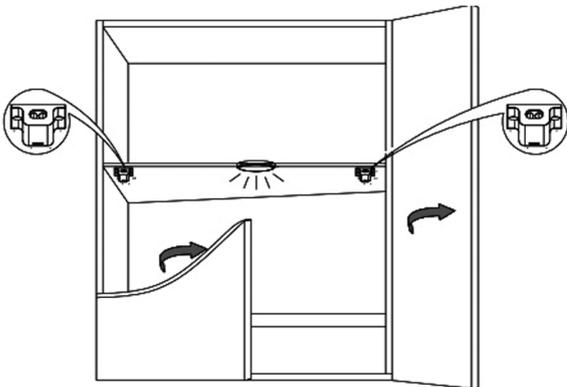


sensor 1

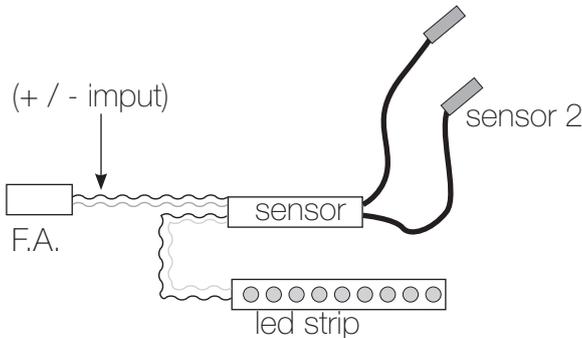

Power (W)	36W (12V)
Power (W)	72W (24V)
Channels (output)	1
Amps	3A
Measurements	65x12x11mm
On-Off	0 - 4cm
Working temperature	-20°C / +45°C
Weight	30g
Waterproofing	IP20
Packaging	1 unit
Guarantee	2 years

Aprobado por: **CE** **RoHS**
COMPLIANT

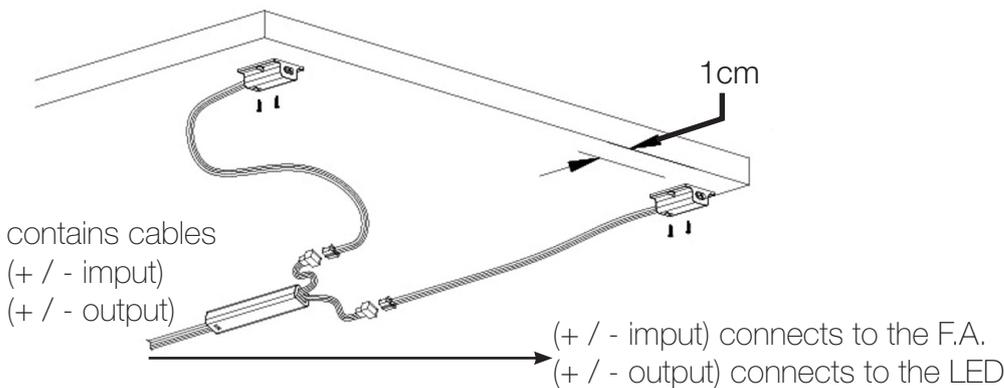

BARCELONA
C/ Carles Buigues, 13
08420 Canovelles
Info@luznegra.net
Tel: +34 938 402 598

MADRID
C/ Adaptación, 27
28906 Getafe
centro@luznegra.net
Tel: +34 916 416 081

PARIS
113 Avenue Joffre
77450 Esbly
france@luznegra.net
Tel: +33 (0) 160 426 585