

Up to:
7000 Lm/m
189 Lm/W


Led + power supply
+ emergency kit
VS LIGHTING
SOLUTIONS

5 year
guarantee

Innovation
made
in
Spain

Up to 200m
with only one
electric supply


Up to 16A
with only one
electric supply

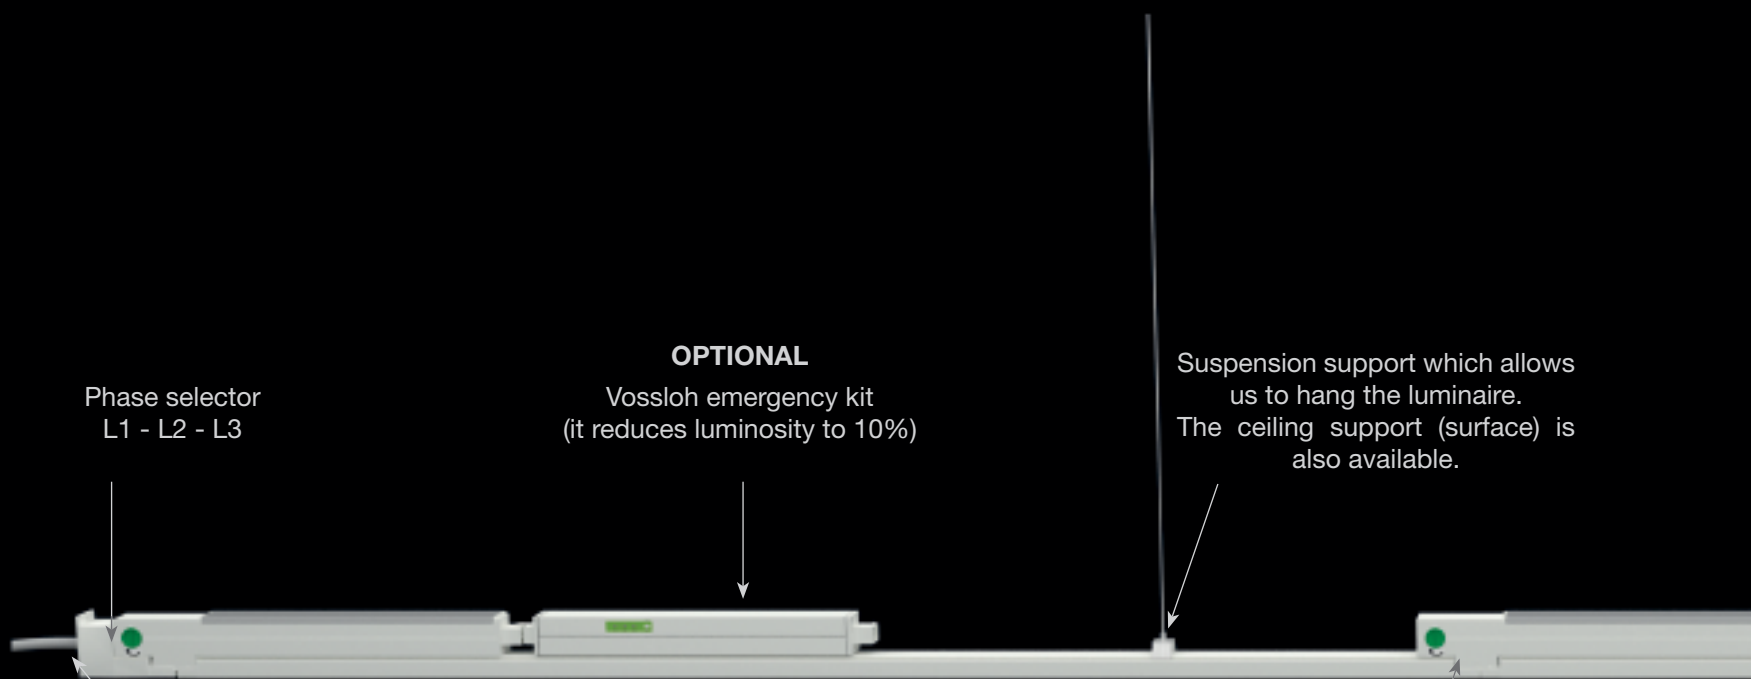

Phase selector
L1 - L2 - L3

OPTIONAL
Vossloh emergency kit
(it reduces luminosity to 10%)

Suspension support which allows
us to hang the luminaire.
The ceiling support (surface) is
also available.

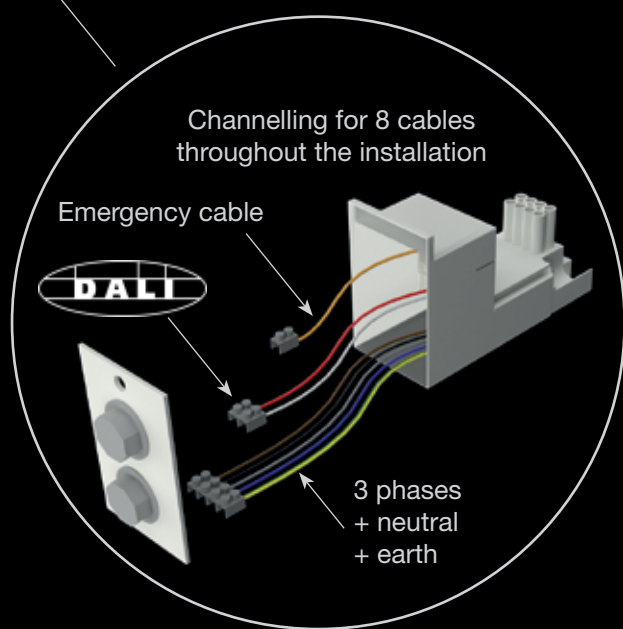


Channelling for 8 cables
throughout the installation

Emergency cable

DALI

3 phases
+ neutral
+ earth

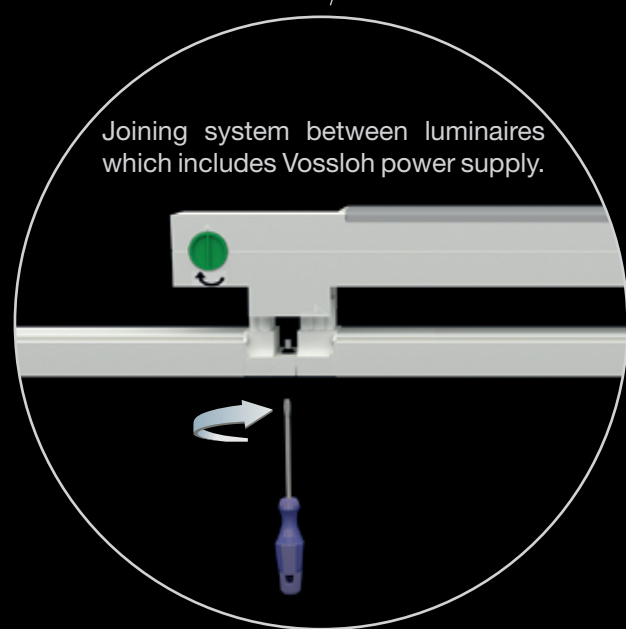


Joining system between luminaires
which includes Vossloh power supply.



Luminaire lengths: 171cm and 285cm
Standard colours: lacquered white - lacquered black

Skyled Channel

The DALI professional lighting system is the easiest and fastest on the market with regards to installation.

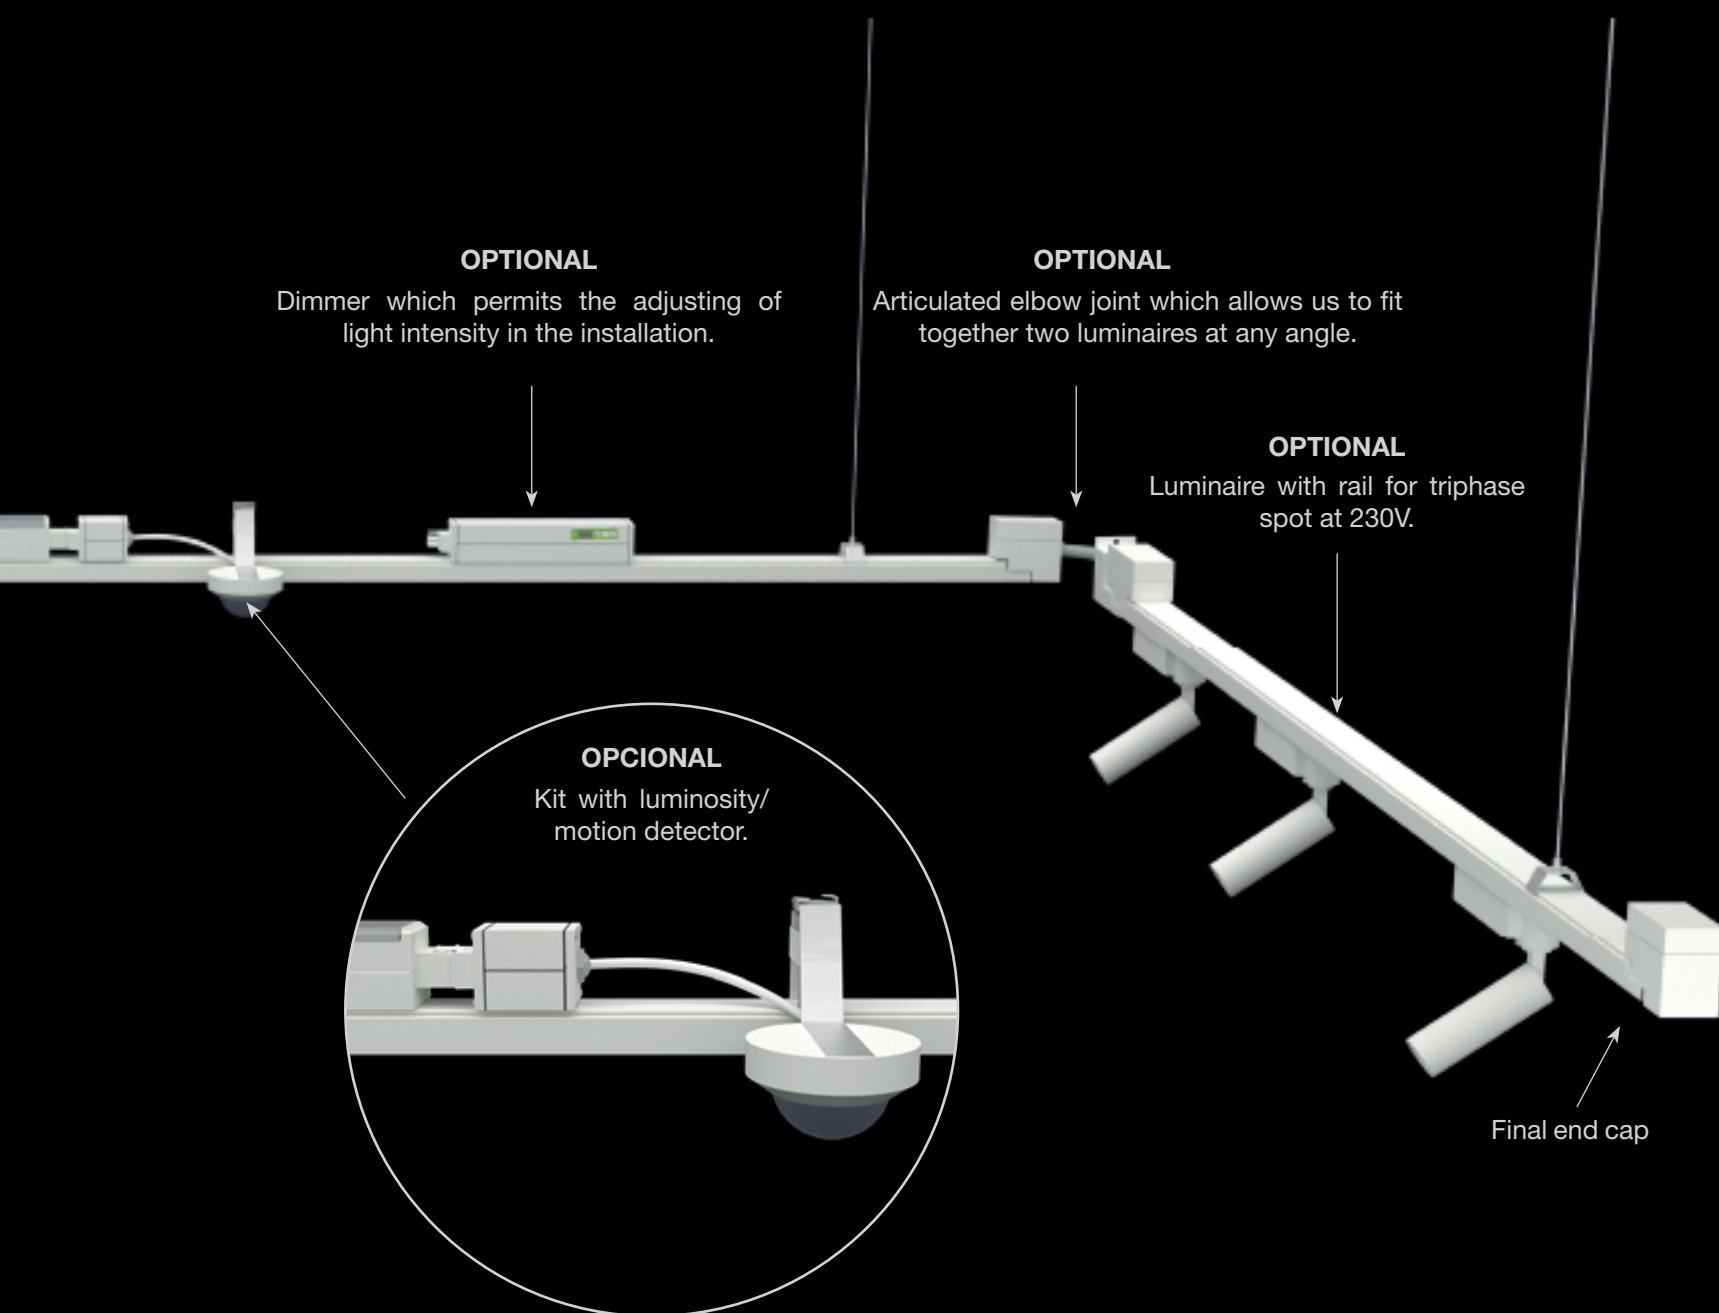

Covers available: transparent - frosted - opal - microprism
Optics available: wide - narrow - drop - batwing - asymmetric

Our luminaires are available in 2 lengths: 2837mm and 1713mm and are supplied in white lacquered or black lacquered. Inside there is a channel with 8 cables, three-phase (three-phase system) + neutral + earth+ emergency + 2 cables for the DALI system.

It offers a waterproofing of IP52 when normal covers are used and IP42 with optics. The luminaire is of Spanish manufacturing and the led inside is by the German company Vossloh (Panasonic Group).

Each luminaire includes an external power supply and 2 clips for hanging. The luminaire also acts as a cable channel (this is where it gets its name from) and apart from giving off light, each section can also be used as an external bypass (of up to 1 ampere) to feed other elements such as lightboxes, vending machines, auxiliary light etc.


This luminaire can also admit blind sections, meaning only the channelling of cables without any type of led or optic, perfect for installations where a continuous light line isn't required.

SKYLED CHANNEL SKL300



● Lacquered textured white or lacquered textured black.

| REFERENCES | SIZE | POWER | LUMENS* (4000°K) | COLOUR TEMPERATURE (°KELVIN) | CRI | POWER SUPPLY | RRP |
|------------|-------|-------|---------------------|---------------------------------|-----|--------------|------|
| 81.045 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.046 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.047 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.048 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.049 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 340€ |
| 81.050 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 340€ |
| 81.051 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 340€ |
| 81.052 | 283cm | 108W | 17250 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 340€ |
| 81.053 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 285€ |
| 81.054 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 285€ |
| 81.055 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 285€ |
| 81.056 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 285€ |
| 81.057 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 300€ |
| 81.058 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 300€ |
| 81.059 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 300€ |
| 81.060 | 171cm | 65W | 10350 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 300€ |

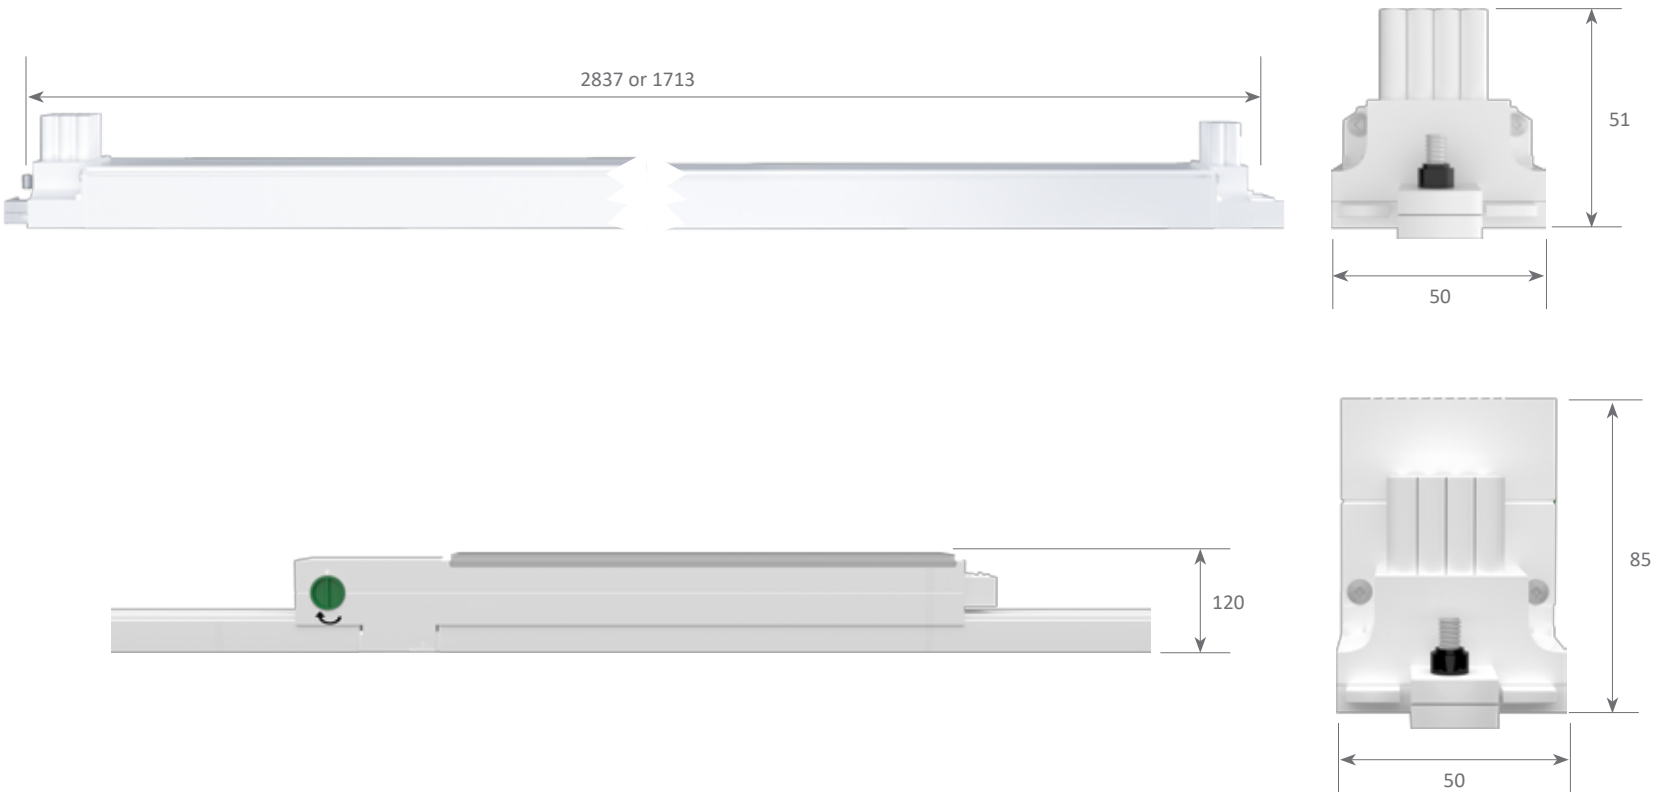

Our luminaires are available in 2 lengths: 2837mm and 1713mm and are supplied in white lacquered or black lacquered. Inside there is a channel with 8 cables, three-phase (three-phase system) + neutral + earth+ emergency + 2 cables for the DALI system.

It offers a waterproofing of IP52 when normal covers are used and IP42 with optics. The luminaire is of Spanish manufacturing and the led inside is by the German company Vossloh (Panasonic Group).

Each luminaire includes an external power supply and 2 clips for hanging. The luminaire also acts as a cable channel (this is where it gets its name from) and apart from giving off light, each section can also be used as an external bypass (of up to 1 ampere) to feed other elements such as lightboxes, vending machines, auxiliary light etc.


This luminaire can also admit blind sections, meaning only the channelling of cables without any type of led or optic, perfect for installations where a continuous light line isn't required.

SKYLED CHANNEL
SKL200



● Lacquered textured white or lacquered textured black.

| REFERENCES | SIZE | POWER | LUMENS* (4000°K) | COLOUR TEMPERATURE (°KELVIN) | CRI | POWER SUPPLY | RRP |
|------------|-------|-------|---------------------|---------------------------------|-----|--------------|------|
| 81.037 | 283cm | 94W | 13200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.038 | 283cm | 94W | 13200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.039 | 283cm | 94W | 13200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.040 | 283cm | 94W | 13200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.041 | 171cm | 57W | 7930 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 280€ |
| 81.042 | 171cm | 57W | 7930 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 280€ |
| 81.043 | 171cm | 57W | 7930 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 280€ |
| 81.044 | 171cm | 57W | 7930 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 280€ |

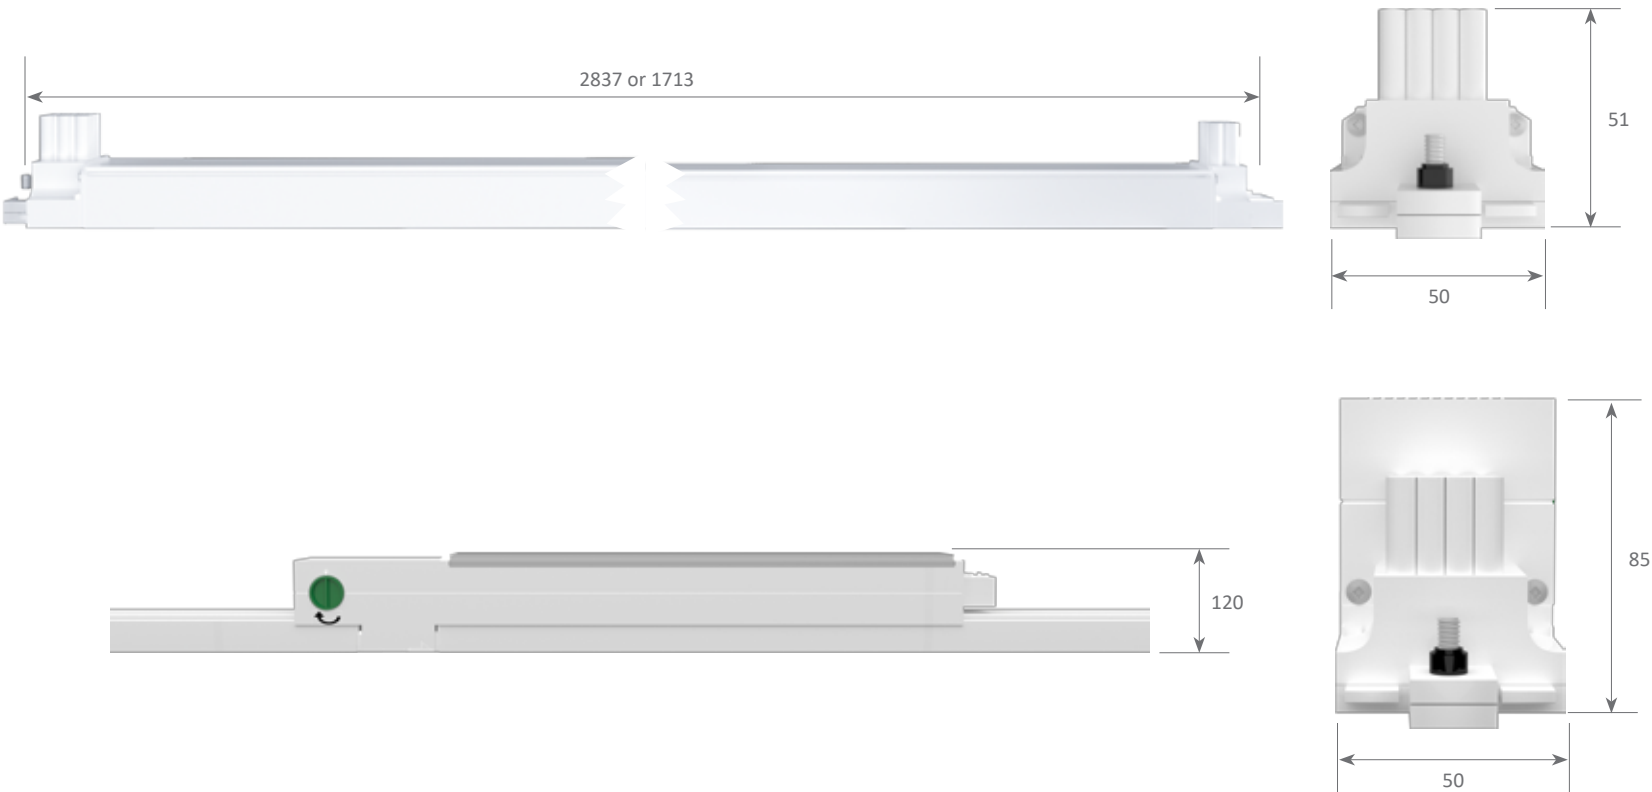

Innovation
made
in
Spain



Our luminaires are available in 2 lengths: 2837mm and 1713mm and are supplied in white lacquered or black lacquered. Inside there is a channel with 8 cables, three-phase (three-phase system) + neutral + earth+ emergency + 2 cables for the DALI system.

It offers a waterproofing of IP52 when normal covers are used and IP42 with optics. The luminaire is of Spanish manufacturing and the led inside is by the German company Vossloh (Panasonic Group).

Each luminaire includes an external power supply and 2 clips for hanging. The luminaire also acts as a cable channel (this is where it gets its name from) and apart from giving off light, each section can also be used as an external bypass (of up to 1 ampere) to feed other elements such as lightboxes, vending machines, auxiliary light etc.


This luminaire can also admit blind sections, meaning only the channelling of cables without any type of led or optic, perfect for installations where a continuous light line isn't required.

SKYLED CHANNEL
SKL150HB



● Lacquered textured white or lacquered textured black.

| REFERENCES | SIZE | POWER | LUMENS* (4000°K) | COLOUR TEMPERATURE (°KELVIN) | CRI | POWER SUPPLY | RRP |
|------------|-------|-------|---------------------|---------------------------------|-----|--------------|------|
| 81.001 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.002 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.003 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.004 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 330€ |
| 81.006 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 350€ |
| 81.007 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 350€ |
| 81.008 | 283cm | 136W | 18950 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 350€ |
| 81.061 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 295€ |
| 81.062 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 295€ |
| 81.063 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 295€ |
| 81.064 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 295€ |
| 81.065 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.066 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.067 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |
| 81.068 | 171cm | 83W | 9957 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 310€ |

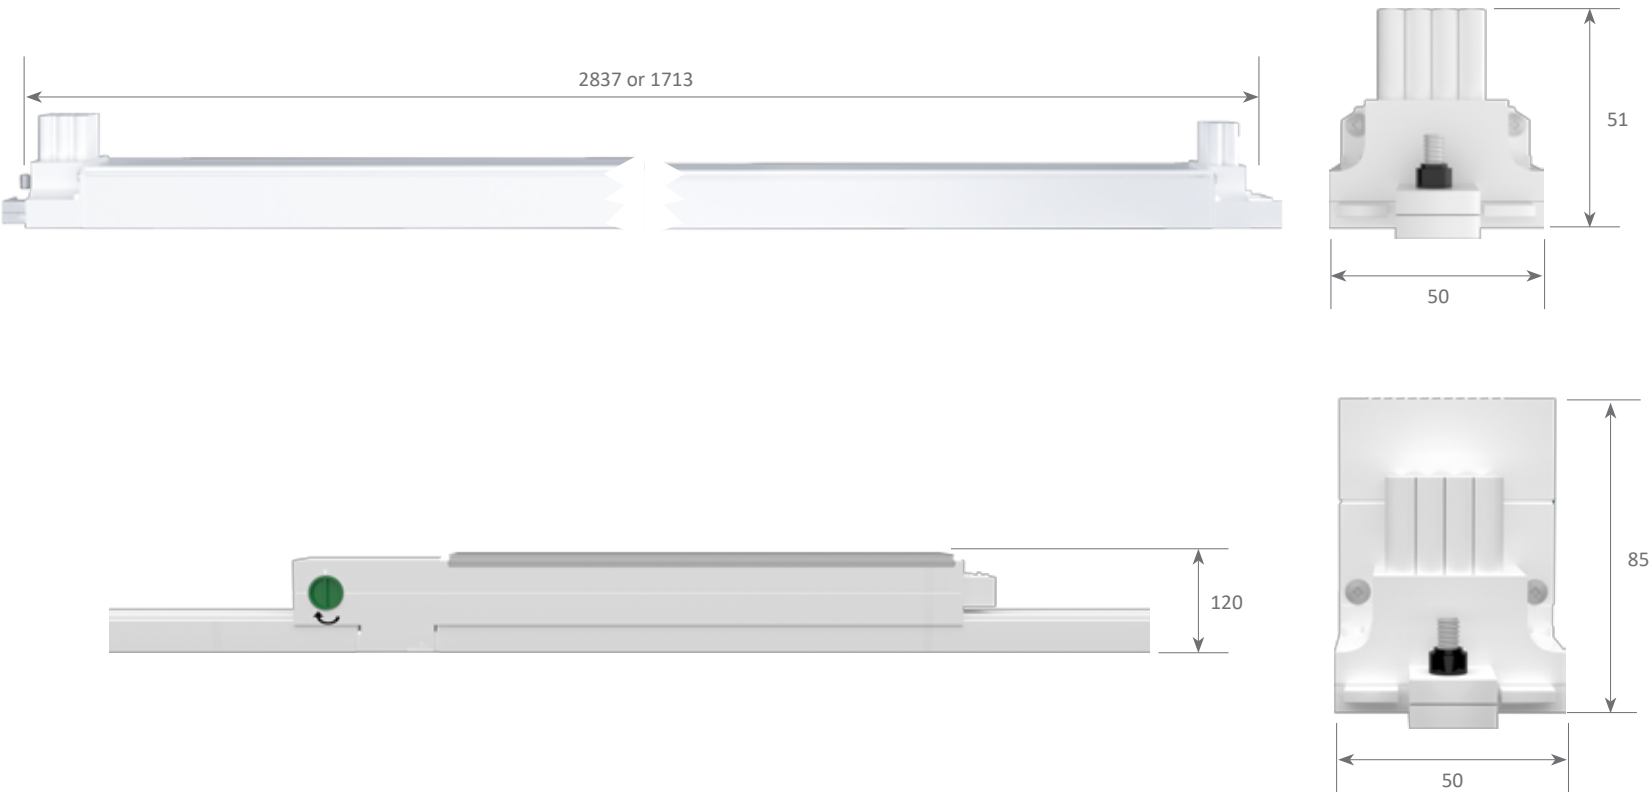

Our luminaires are available in 2 lengths: 2837mm and 1713mm and are supplied in white lacquered or black lacquered. Inside there is a channel with 8 cables, three-phase (three-phase system) + neutral + earth+ emergency + 2 cables for the DALI system.

It offers a waterproofing of IP52 when normal covers are used and IP42 with optics. The luminaire is of Spanish manufacturing and the led inside is by the German company Vossloh (Panasonic Group).

Each luminaire includes an external power supply and 2 clips for hanging. The luminaire also acts as a cable channel (this is where it gets its name from) and apart from giving off light, each section can also be used as an external bypass (of up to 1 ampere) to feed other elements such as lightboxes, vending machines, auxiliary light etc.


This luminaire can also admit blind sections, meaning only the channelling of cables without any type of led or optic, perfect for installations where a continuous light line isn't required.

SKYLED CHANNEL SKL150



● Lacquered textured white or lacquered textured black.

| REFERENCES | SIZE | POWER | LUMENS* (4000°K) | COLOUR TEMPERATURE (°KELVIN) | CRI | POWER SUPPLY | RRP |
|------------|-------|-------|---------------------|---------------------------------|-----|--------------|------|
| 81.013 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 275€ |
| 81.014 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 275€ |
| 81.015 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 275€ |
| 81.016 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 275€ |
| 81.017 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 290€ |
| 81.018 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 290€ |
| 81.019 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 290€ |
| 81.020 | 283cm | 67W | 10300 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 290€ |
| 81.021 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 240€ |
| 81.022 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 240€ |
| 81.023 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 240€ |
| 81.024 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 240€ |
| 81.025 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 255€ |
| 81.026 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 255€ |
| 81.027 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 255€ |
| 81.028 | 171cm | 40W | 6180 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 255€ |

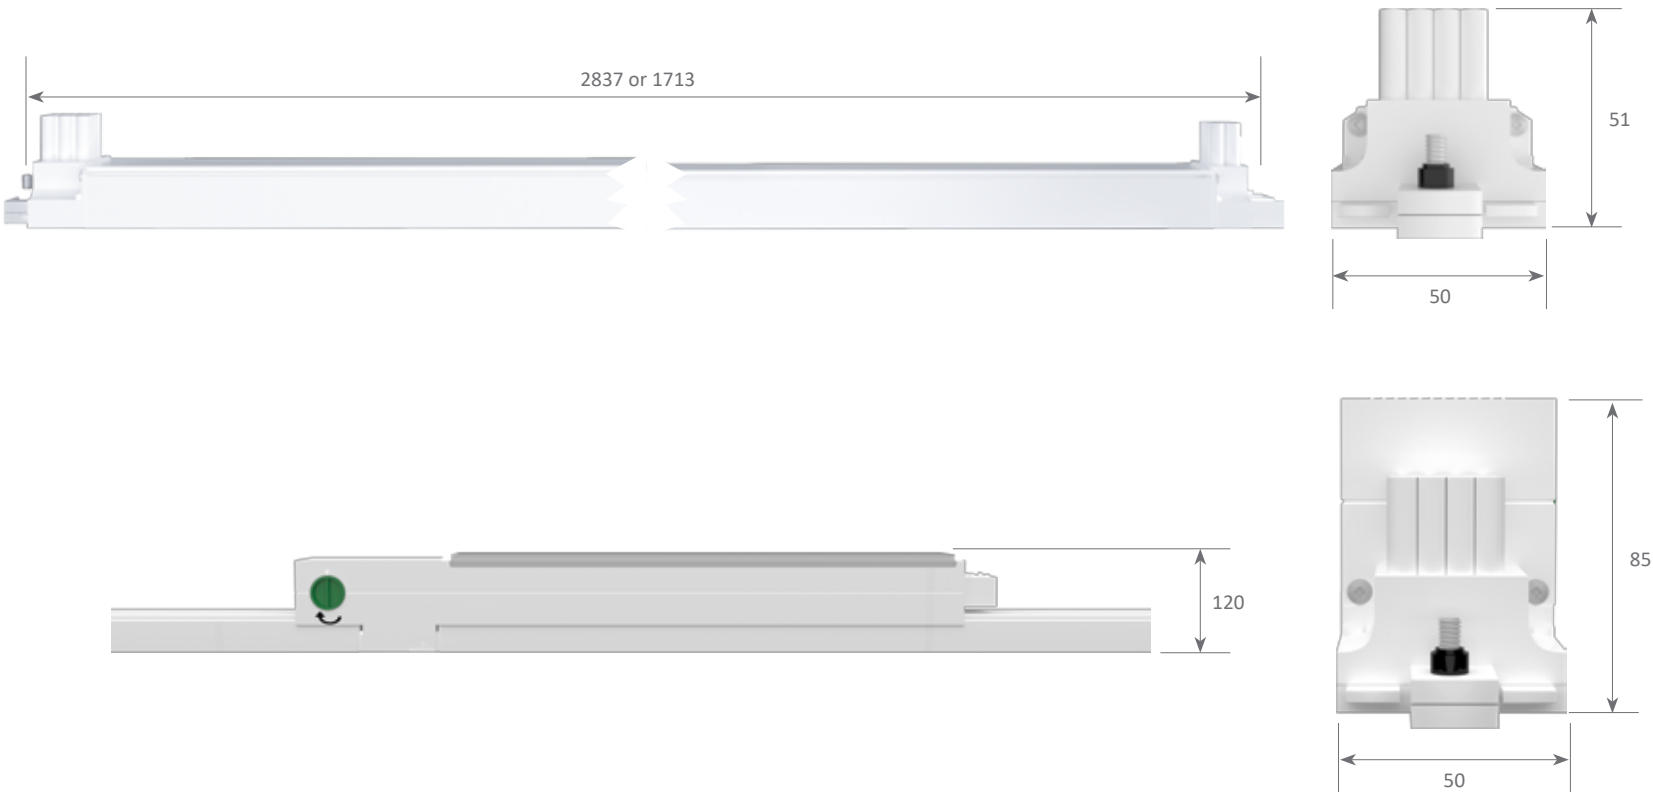

Our luminaires are available in 2 lengths: 2837mm and 1713mm and are supplied in white lacquered or black lacquered. Inside there is a channel with 8 cables, three-phase (three-phase system) + neutral + earth+ emergency + 2 cables for the DALI system.

It offers a waterproofing of IP52 when normal covers are used and IP42 with optics. The luminaire is of Spanish manufacturing and the led inside is by the German company Vossloh (Panasonic Group).

Each luminaire includes an external power supply and 2 clips for hanging. The luminaire also acts as a cable channel (this is where it gets its name from) and apart from giving off light, each section can also be used as an external bypass (of up to 1 ampere) to feed other elements such as lightboxes, vending machines, auxiliary light etc.


This luminaire can also admit blind sections, meaning only the channelling of cables without any type of led or optic, perfect for installations where a continuous light line isn't required.

SKYLED CHANNEL SKL120



● Lacquered textured white or lacquered textured black.

| REFERENCES | SIZE | POWER | LUMENS* (4000°K) | COLOUR TEMPERATURE (°KELVIN) | CRI | POWER SUPPLY | RRP |
|------------|-------|-------|---------------------|---------------------------------|-----|--------------|------|
| 81.029 | 283cm | 86W | 12200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.030 | 283cm | 86W | 12200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.031 | 283cm | 86W | 12200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.032 | 283cm | 86W | 12200 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.033 | 171cm | 51W | 7320 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.034 | 171cm | 51W | 7320 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.035 | 171cm | 51W | 7320 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |
| 81.036 | 171cm | 51W | 7320 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 270€ |

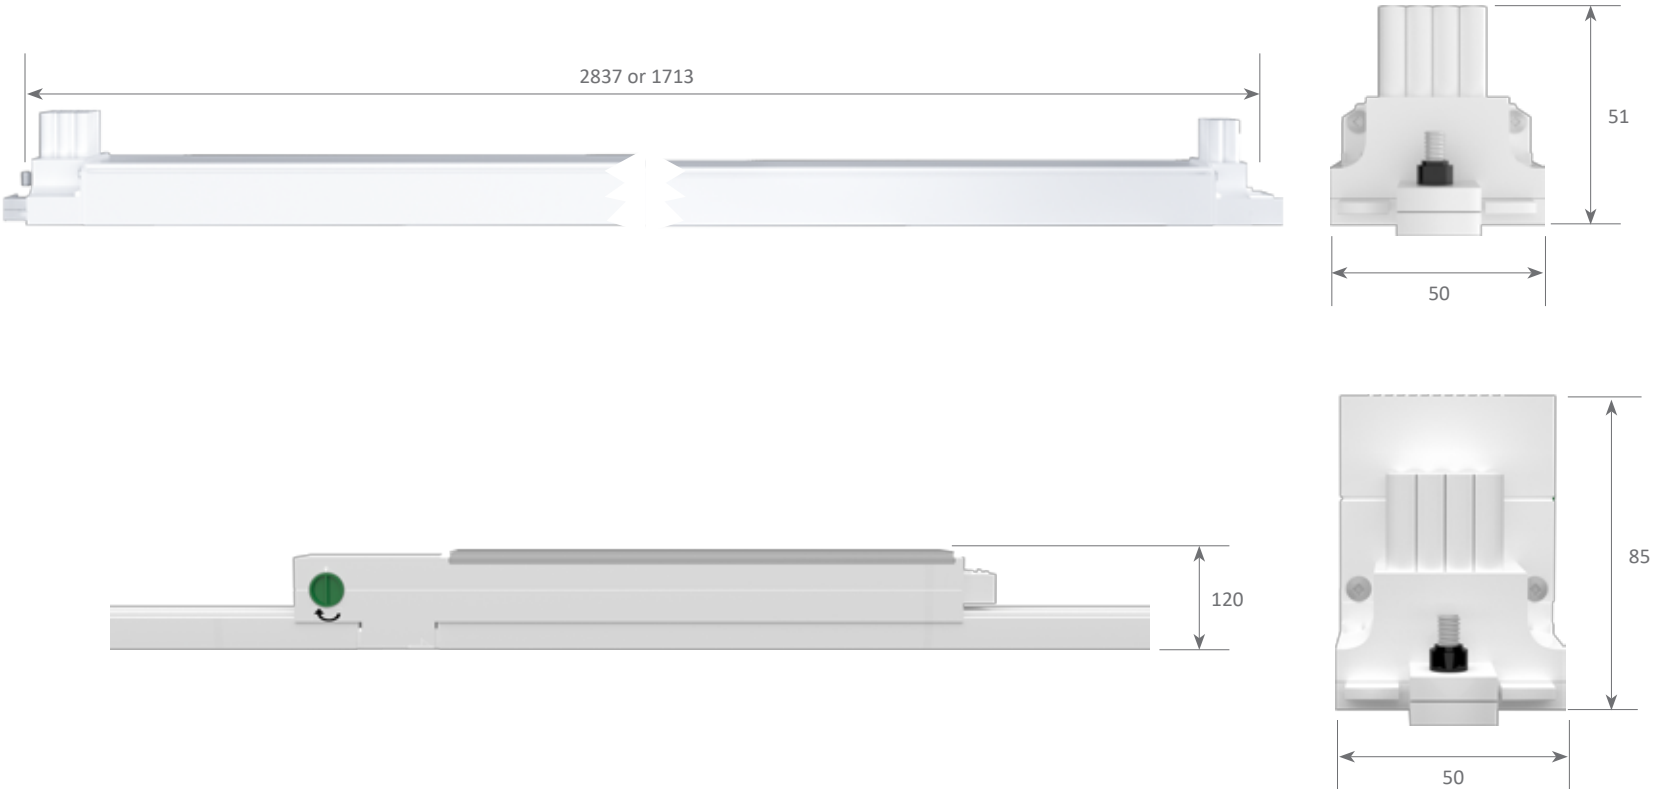

Innovation
made
in
Spain



Our luminaires are available in 2 lengths: 2837mm and 1713mm and are supplied in white lacquered or black lacquered. Inside there is a channel with 8 cables, three-phase (three-phase system) + neutral + earth+ emergency + 2 cables for the DALI system.

It offers a waterproofing of IP52 when normal covers are used and IP42 with optics. The luminaire is of Spanish manufacturing and the led inside is by the German company Vossloh (Panasonic Group).

Each luminaire includes an external power supply and 2 clips for hanging. The luminaire also acts as a cable channel (this is where it gets its name from) and apart from giving off light, each section can also be used as an external bypass (of up to 1 ampere) to feed other elements such as lightboxes, vending machines, auxiliary light etc.


This luminaire can also admit blind sections, meaning only the channelling of cables without any type of led or optic, perfect for installations where a continuous light line isn't required.

SKYLED CHANNEL SKL100



● Lacquered textured white or lacquered textured black.

| REFERENCES | SIZE | POWER | LUMENS* (4000°K) | COLOUR TEMPERATURE (°KELVIN) | CRI | POWER SUPPLY | RRP |
|------------|-------|-------|---------------------|---------------------------------|-----|--------------|------|
| 81.009 | 283cm | 46W | 6600 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 235€ |
| 81.010 | 283cm | 46W | 6600 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 235€ |
| 81.011 | 283cm | 46W | 6600 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 235€ |
| 81.012 | 283cm | 46W | 6600 Lm | 3000°K - 4000°K - 5000°K | >85 | Externa | 235€ |

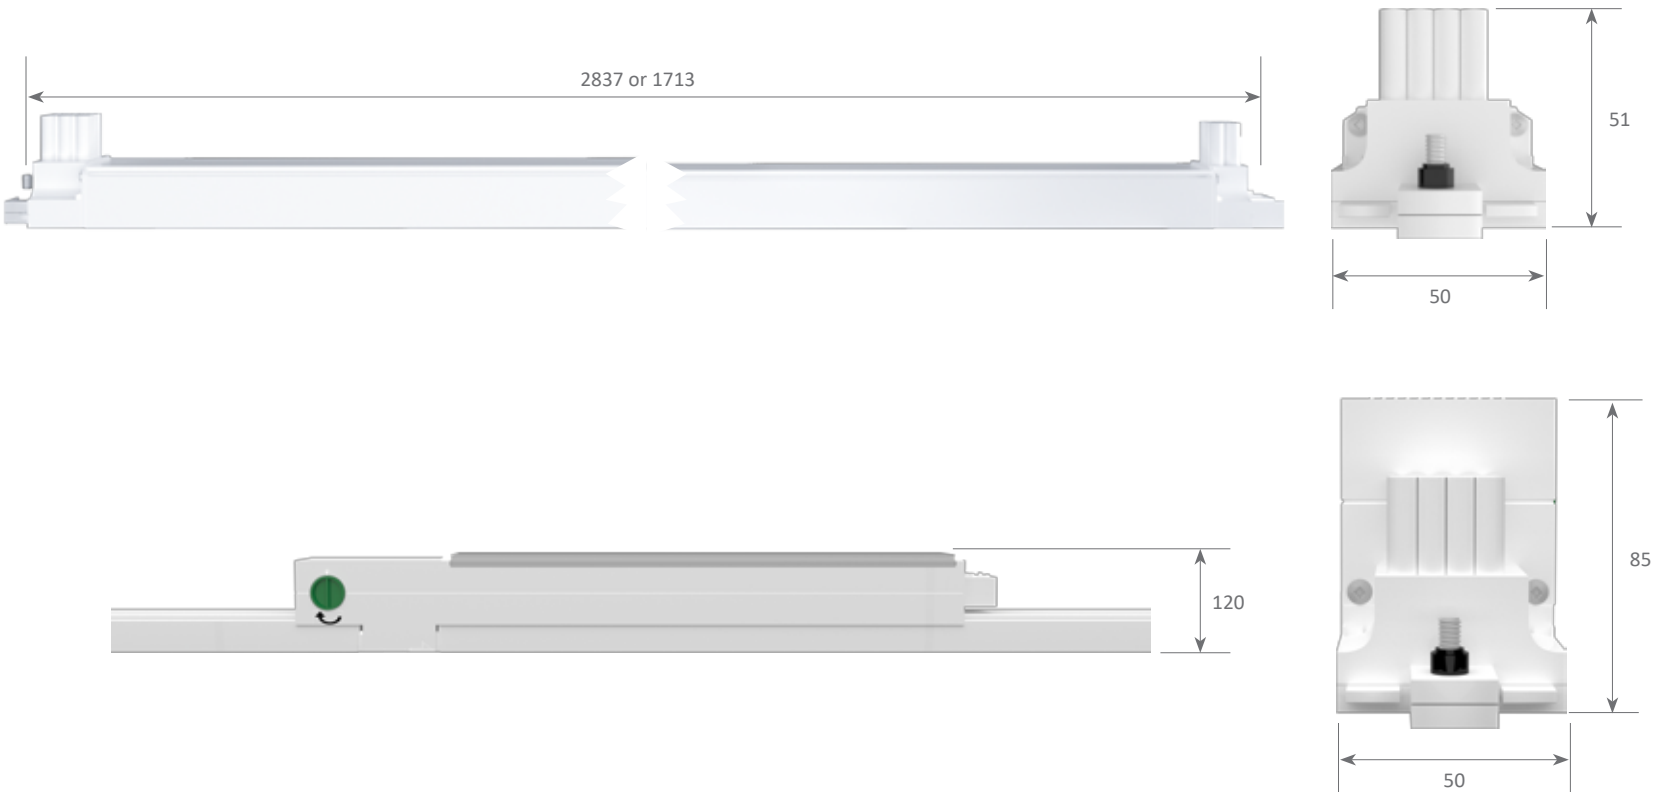

Innovation
made
in
Spain



The basic elements of our Skyled Channel



Kit for dimming the complete installation
Ref: 81.069 170€




Emergency kit for reducing luminosity to 10% nominal
Ref: 81.070 225€

Our Skyled Channel is compatible with 3-phase rails (for spotlights).
It can be supplied in modules with 3-phase rails and can be combined with other types of linear lighting.



Bypass box
Ref: 81.077 50€

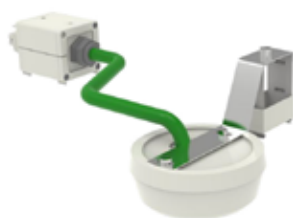


Light sensor kit
Ref: 81.074 320€



Presence detection kit
Ref: 81.075 350€
Ref: 81.082 230€



Initial power connection with End connector
Ref: 81.073 45€

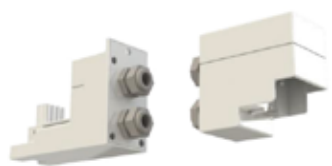

Joint between 2 luminaires
Ref: 81.083 70€



Joining kit with adjustable flexible tube
Ref: 81.076 75€



Anchoring system for hanging luminaires
Ref: 81.071 75€



Anchoring system for surface luminaires
Ref: 81.072 85€




Clip for accessories
Ref: 81.084 12.50€



Blind section
Ref: 81.078 90€
Ref: 81.079 90€
Ref: 81.086 115€
Ref: 81.087 115€



Section with three-phase rail grommet
Ref: 81.080 170€
Ref: 81.081 170€
Ref: 81.088 200€
Ref: 81.089 200€



Grommet rail
Ref: 81.085 17€