
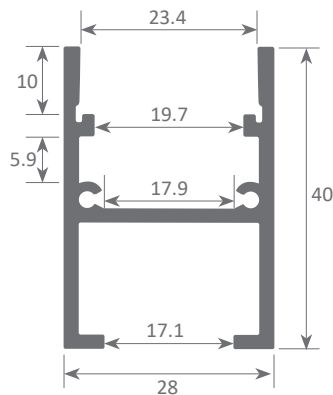


Our PROFESSIONAL led profile series, treadable for indoor and outdoor use, is manufactured in high purity aluminium and available in anodised silver. Suitable for illuminating stairs and floors, such as gardens, bathrooms, corridors, balconies, and others.

This profile and its covers are available in lengths of 2 metres, allowing us to carry out large projects where all the profiles do not need joints. Suitable for led strips with a maximum width of 17mm and a power not greater than 40W/m. In order to avoid system malfunctions and potential failures, we recommend combining this profile with our Canovelles-Vizcaya ecoled strips or similar products with our DUO waterproof system. When installed under conditions of high humidity, we suggest filling it with Epoxy resin in order to achieve an IP67 rating (a 2mm thick layer on top of the led strip).

We offer a 2 year guarantee.

Scale 1:1



Aluminium profile

07.010 anodised silver 2m



Endcaps

19.224 aluminium white lacquered



Union endcaps

19.356 aluminium



Methacrylate cover

18.084 opal 2m



Epoxy Resin

22.018 1 Kg
+ 1 catalyst of 400g



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Alloy: 6063 / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0